


How to measure

TOP AND SIDE SEALS

FOR SECTIONAL, COMMERCIAL
AND ROLLER DOORS

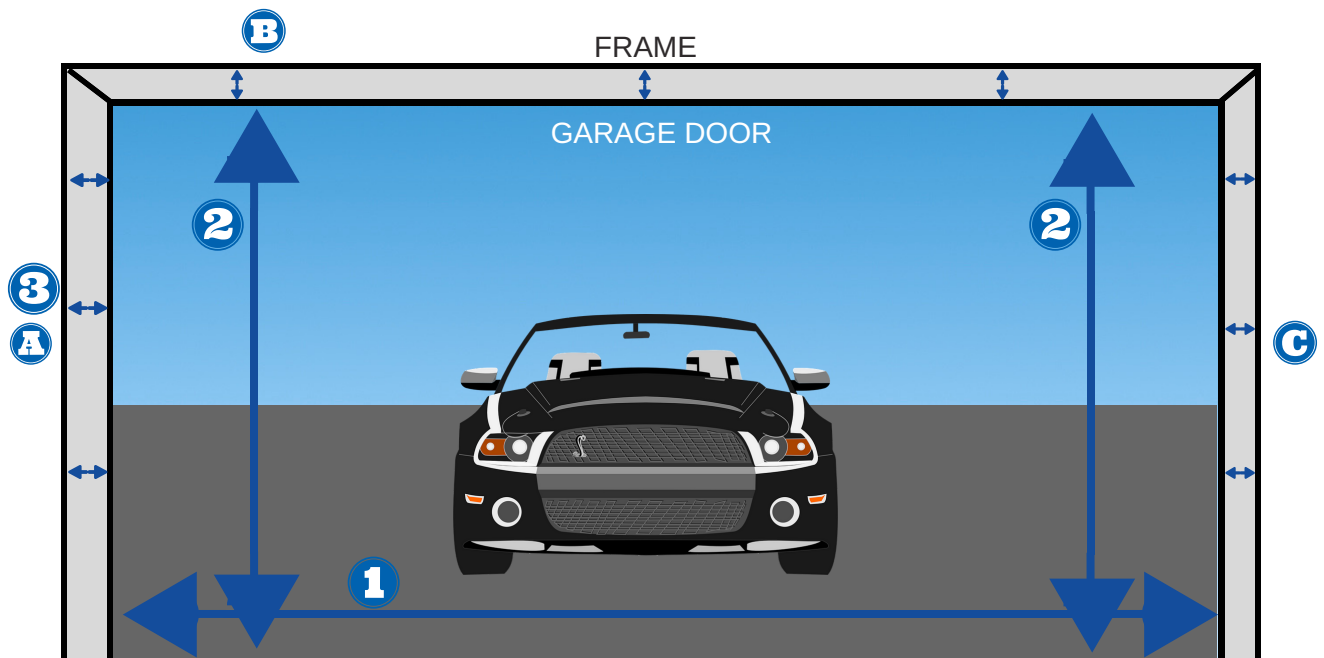

1. WIDTH

Standing outside looking into your garage, measure the width of door opening at the widest point. This is the distance between the right and left sides, commonly known as the daylight measure.

2. HEIGHT

Standing outside looking into your garage, measure the height of the door opening on the left and right hand side. Concrete floor to the corner where the horizontal and vertical axis meets.

3. GAPS AROUND DOOR

Standing outside looking into your garage, measure the largest gap - as shown ABC, when the door is in the closed position.